


Technical data

Company name
Contact
Phone number
e-mail address

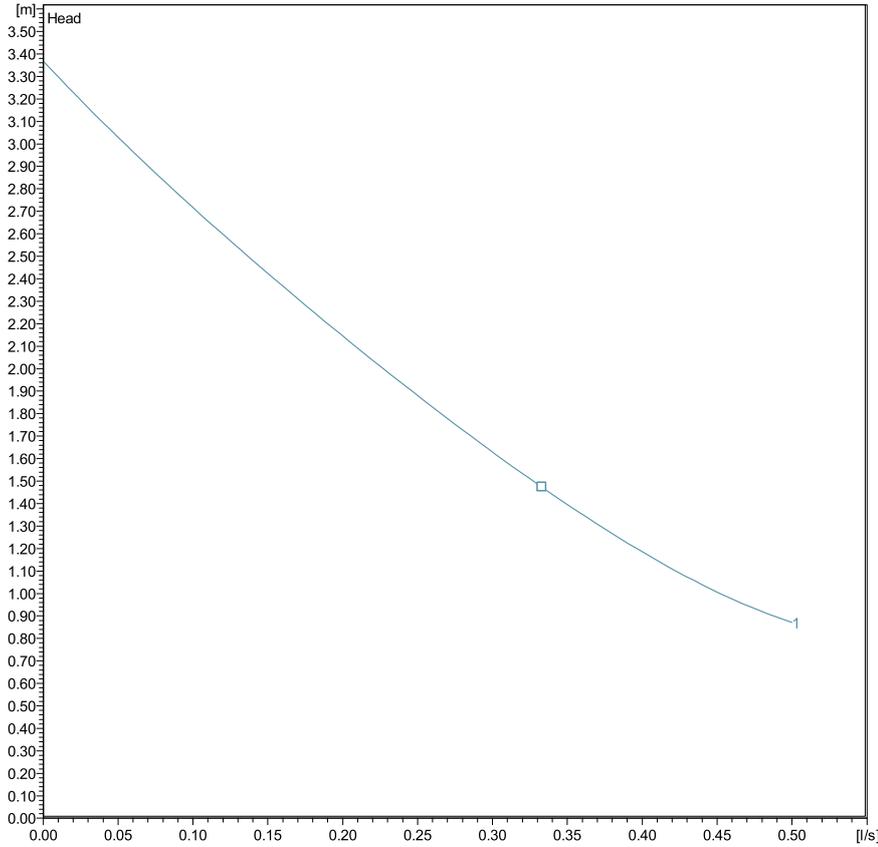

Performance according to ISO 9906:2012 – Grade 3B

Liquid temperature:

Power data referred to:

Water, pure [100%]; 4°C; 1000kg/m³; 1.57mm²/s

-10°C (14°F) to +110 °C (230°F) for heating pumps

-10°C (14°F) to +85 °C (185°F) for domestic hot water pumps

Pump data


Make	Lowara
Port to port (mm)	150
Fixed Piping	¾"
Temperature class	TF110
Nominal pressure	10 bar (PN 10)
Connection	G 1 ¼"

Electrical data

Frequency	50
Protection class	IP 44
Insulation class	H
Capacitator [µF]	3
Capacitator [V]	400
Rated Power [W]	56
Rated current [A]	0,27
Power Supply	1x230V, 50Hz
Sound pressure level	< 45 dB(A)

Materials

Bearings	Ceramic	Pump body	Stainless steel
Gaskets	EPDM	Shaft	Ceramic
Impeller	Composite material	Wear ring	Ceramic
Inner jacket	Stainless steel		

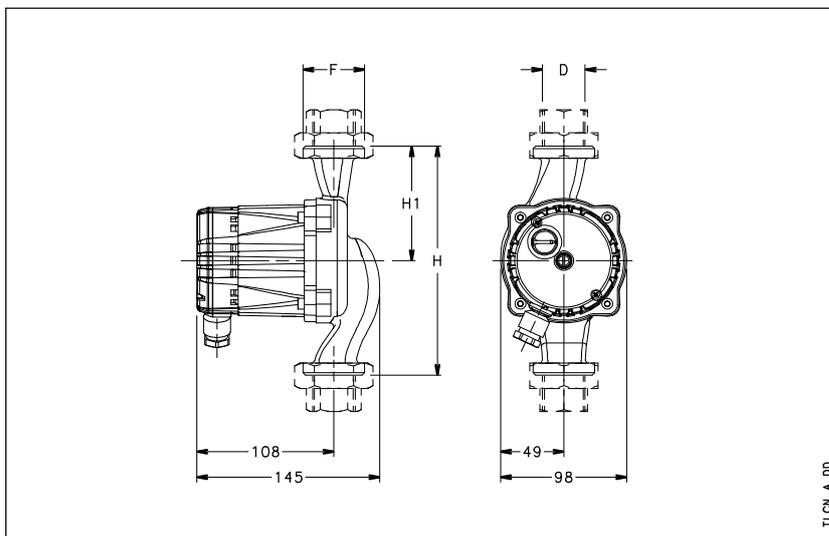

Dimensions mm

D	¾"
DN	20
F	G 1 ¼"
H	150
H1	75